





INSTALL GUIDE FOR FRONT LICENSE PLATE GARNISH KIT



Since license plate differs among countries, this kit is to be attached after it is delivered to destination for safety and pleasing appearance. Please attach the plate according to regulation in a country where a vehicle will be registered.

Kit contents


- | | | | | |
|--|---|---|---------------------------|----|
| (1) | (2) | (3) | (1) License plate garnish | x1 |
|  |  |  | (2) Rubber nut | x3 |
| | | | (3) Machine screw (M6x30) | x3 |

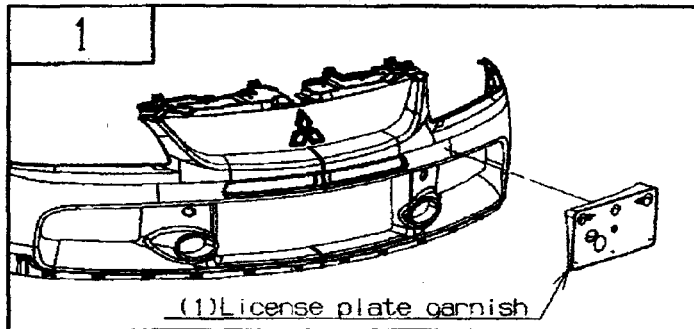

1. Locate a (1) License plate garnish on the front bumper.
2. L1 and L2 are the locators. (See the fig. below)

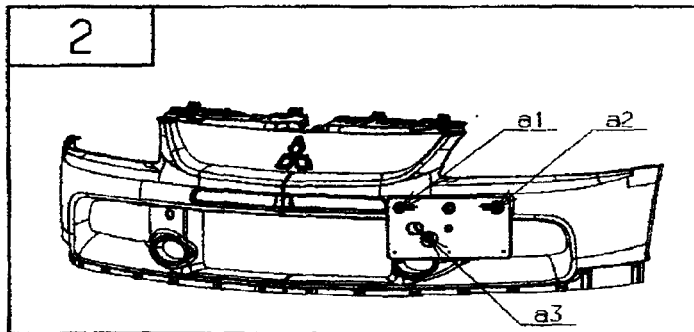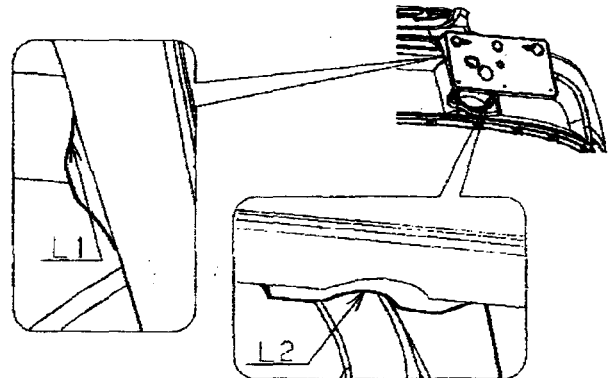

2. Mark at the center of the holes. a1, a2 and a3, in the license plate garnish.

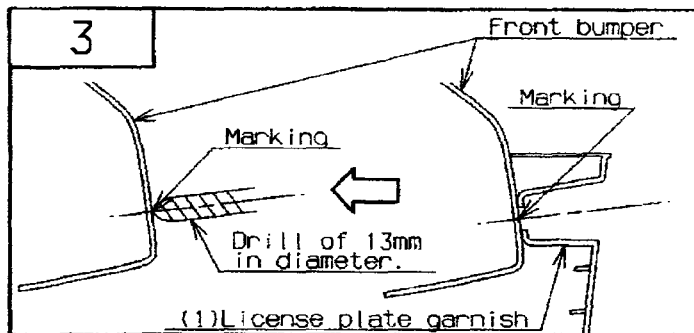

3. Take the (1) License plate garnish off and make holes of 13mm in diameter at the marks. (Please be careful not to damage the backside of the bumper.)

4. Put the enclosed (2) Rubber nuts into the holes in the front bumper and fasten them with the enclosed (3) Machine screws (M6x30).

