

# INSTALLATION INSTRUCTION

PART# C121799

## ROOF RAIL FOR MITSUBISHI

### NOTICE:

- ≡ The figures here are for reference only and may have differences with the actual product you received, however they share the same assembly way.
- ≡ Please read the instruction completely for easy installation, which will also help you to avoid scratches or other potential damages to your appealing car.
- ≡ Please periodically check and retighten all the hardware and clean the investment for a refresh look.


### PARTS LIST:

No.	Name	Qty	Remarks	No.	Name	Qty	Remarks
①	Roof rail	2		⑦	Bracket 1	4	16*86.7
②	Front cover	2		⑧	Bracket 2	4	16*103.4
③	Front rubber washer	2		⑨	Flange Bolt	24	M6x16
④	Middle cover	2		⑩	Flange Bolt	2	M6x20
⑤	Rear cover	2		⑪	Flat nut	18	
⑥	Rear rubber washer	2		⑫	Plate	18	

### ASSEMBLY PROCEDURE:


Step 1: Check all the contents are available in accordance with the above list.

Step 2: Remove the strip.

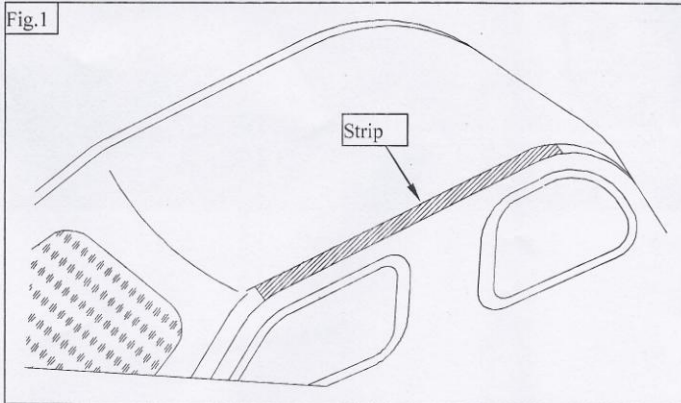


Step 3: Install the front and rear rubber washer on roof rail as fig.2 showing.

Fig.2

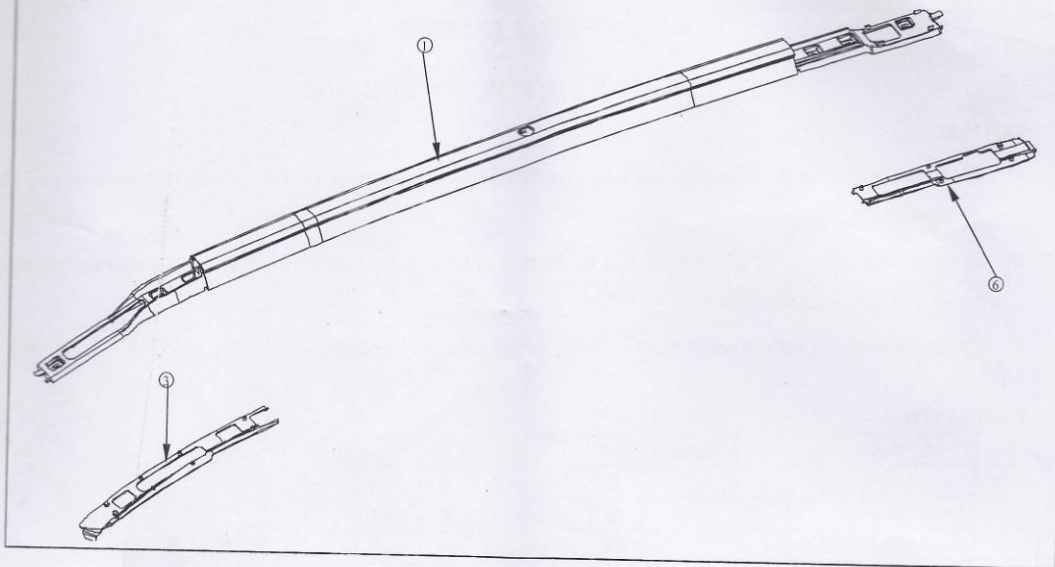


Step 4: Put the roof rail on vehicle as fig.3 showing.

Fig.3

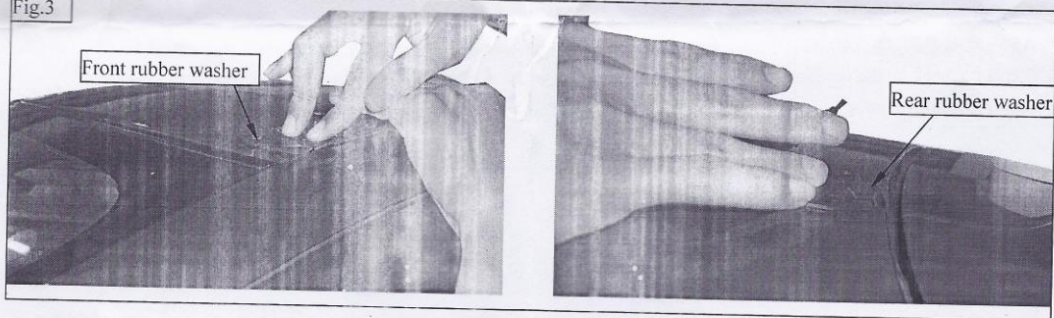


Step 5: Take 5 marks on the vehicle by drawing through the holes on the bottom base.

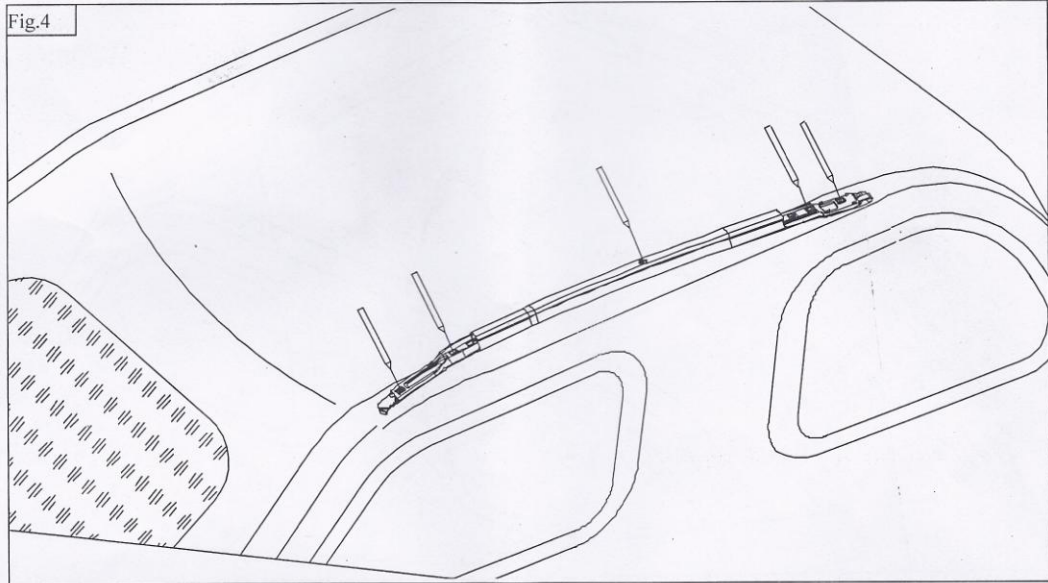


Step 6: Remove the roof rail, and then got a fix on the vehicle, make 8 marks through the bracket 1 and bracket 2 holes.

Step 7: Remove the bracket 1 and 2.

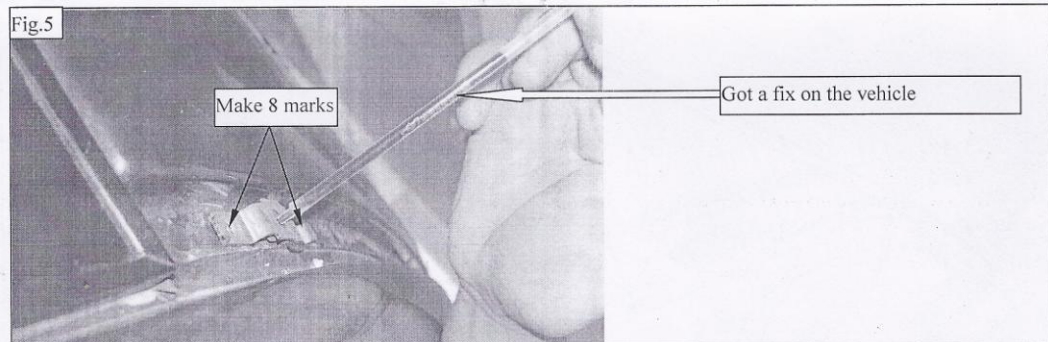

Step 8: Drill 9 3mm holes through the position of the marks, then enlarge the diameter of the hole to 10.2mm. Clean the bu.


Fig.6

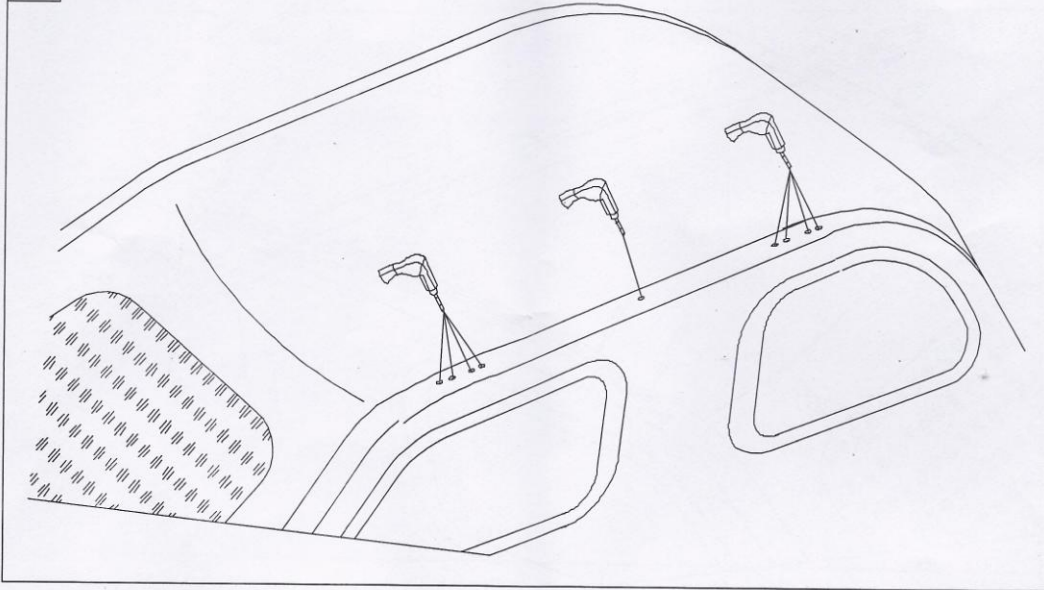


Step 9: Install the ⑪⑫ into holes using the flange bolt.

Step 10: Coat the airproof adhesive on holes.


Fig.7

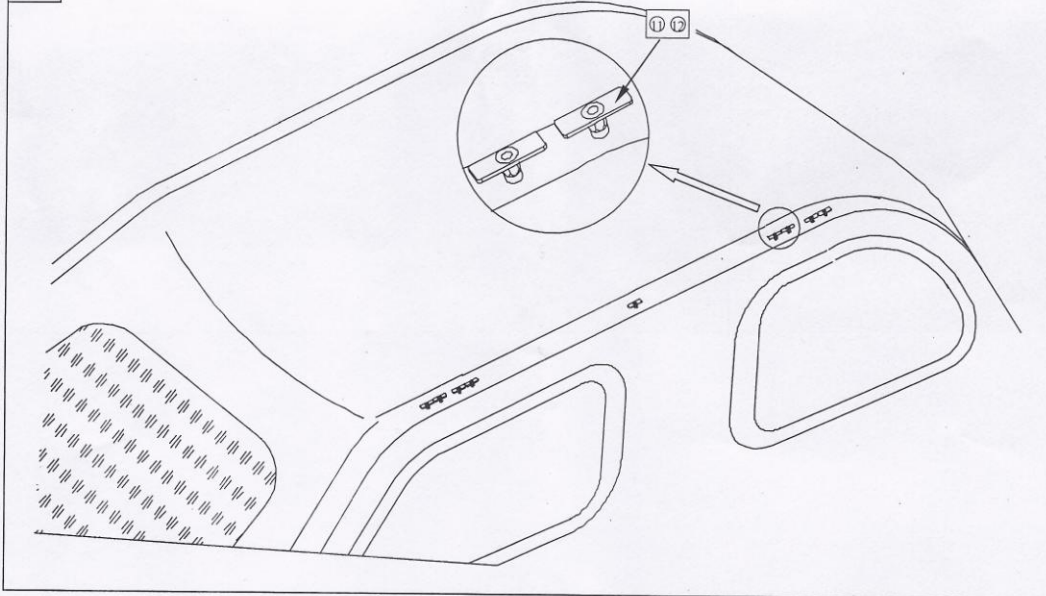

Step 11: Install the bracket 1 and bracket 2 on vehicle.

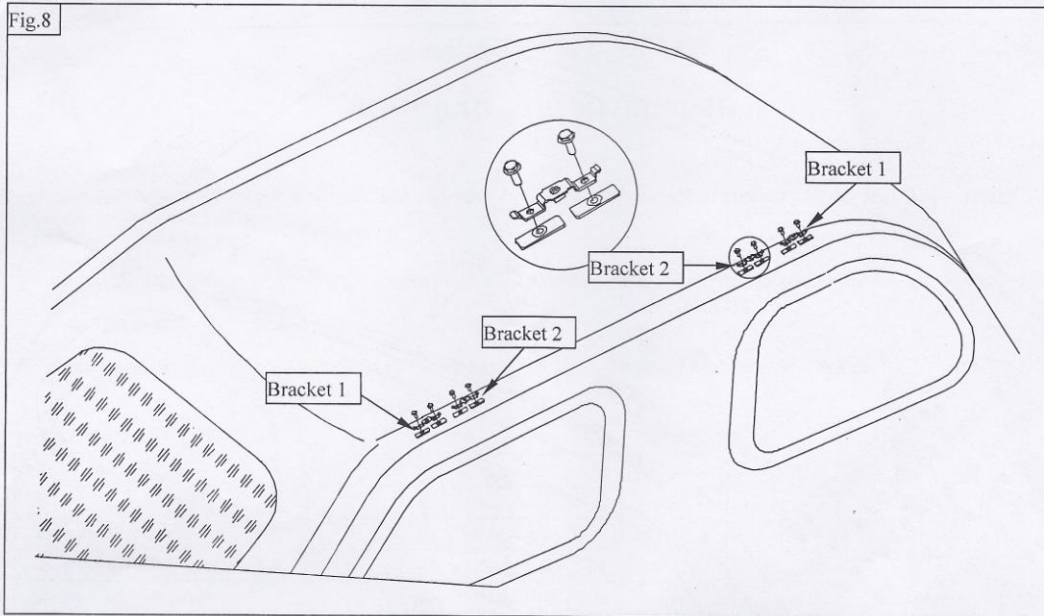


Step 12: Install the roof rail on vehicle.

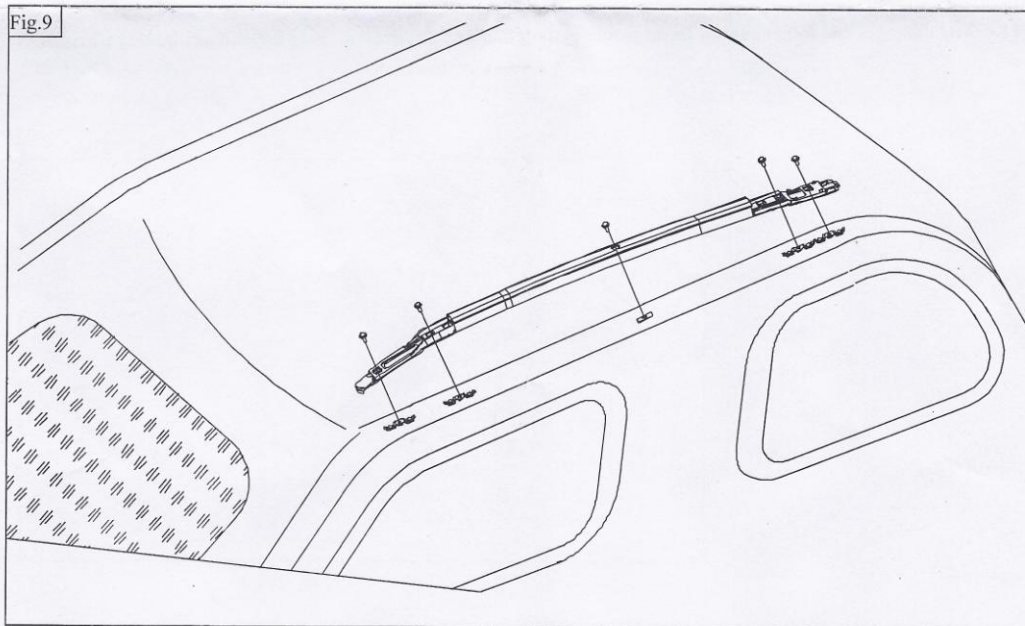

Step 13: Install the covers on roof rail.

Fig.10

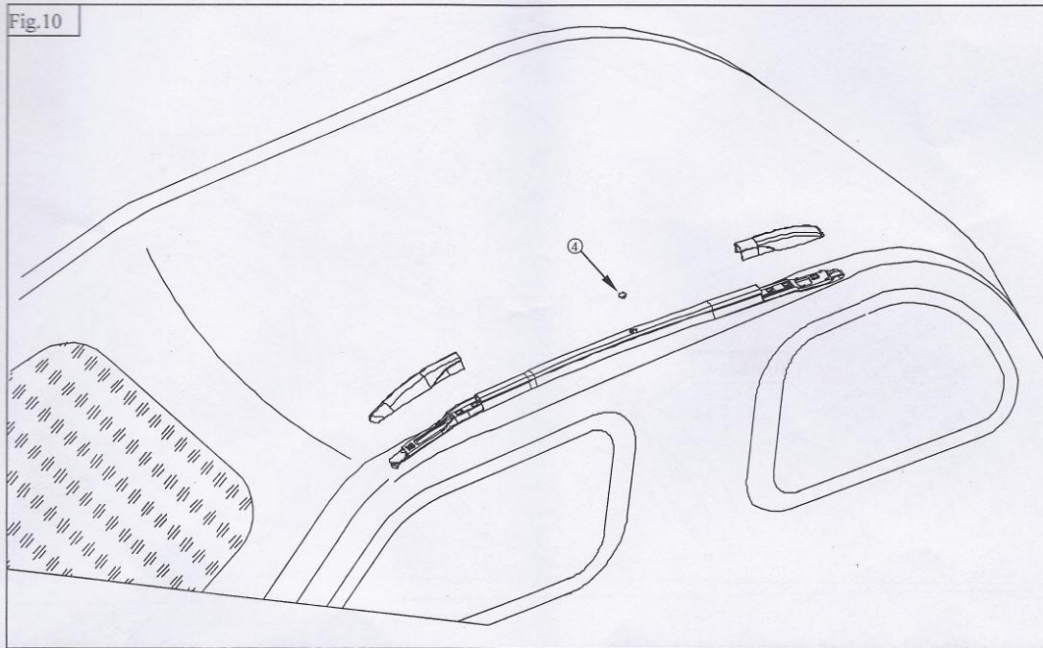

**NOTE:** Any damages and losses caused by improper installation and application, goes beyond our quality warranty.